

RANGE **MI**  
IC masted forklift trucks







## Machines which meet your needs

Whatever the load type and operating frequency, you will find the solution in the MI range.



Turning radius  
from  
**1985 mm**

up to  
**6,5 m**  
lifting height


Capacities from  
**1,5 TO 10  
TONS**



## Strong machines

Our trucks are equipped with monobloc chassis, and have strengthened masts and axles. The Okamura transmission (small and medium tonnage units) optimizes the efficiency of the various engines. The Powershift transmission in the MI large tonnage units has been developed specifically for heavy duty applications.

The machines are fitted as standard with an air filter consisting of a primary filter and a security cartridge and are designed to resist corrosion and vibration. That means increased longevity and filtering capacity. For the toughest applications, a self-cleaning cyclonic pre-filter is available.

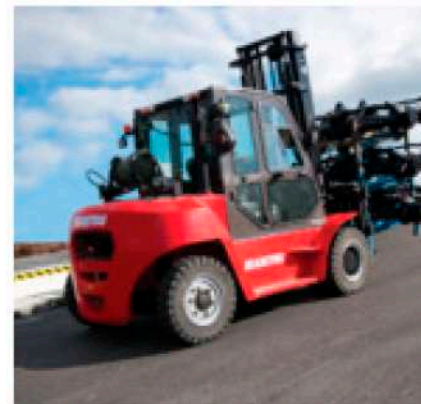



## Low capacities



### **MI 15**

LPG / Diesel

29 (39)  
32,8 (44)

1.500

500

FEM 2A

6.500

1.985

2.240



### **MI 18**

LPG / Diesel

29 (39)  
32,8 (44)

1.800

500

FEM 2A

6.500

2.010

2.280



### **MI 20**

LPG / Diesel

35 (47)

2.000

500

FEM 2A

6.500

2.200

2.465

Energy

Engine power

LPG

Diesel

kW (HP)

Capacity

kg

Load centre

mm

Carriage

Max. lifting height

mm

Turning radius

mm

Length w/o forks

mm



## **MI 25**

LPG / Diesel

35 (47)

2.500

500

FEM 2A

6.500

2.265

2.535



## **MI 30**

LPG / Diesel

35 (47)

3.000

500

FEM 3A

6.500

2.460

2.715



## **MI 35**

LPG / Diesel

35 (47)

3.500

500

FEM 3A

6.500

2.510

2.785

